



Neptune[®]
LIGHTS
ILLUMINATE YOUR LIFE

FLEXIBLE
MAGNETIC
TRACK
LIGHT


FTS MAGNETIC



FTS MAGNETIC

Neptune®
LIGHTS
ILLUMINATE YOUR LIFE

Signature
DESIGN

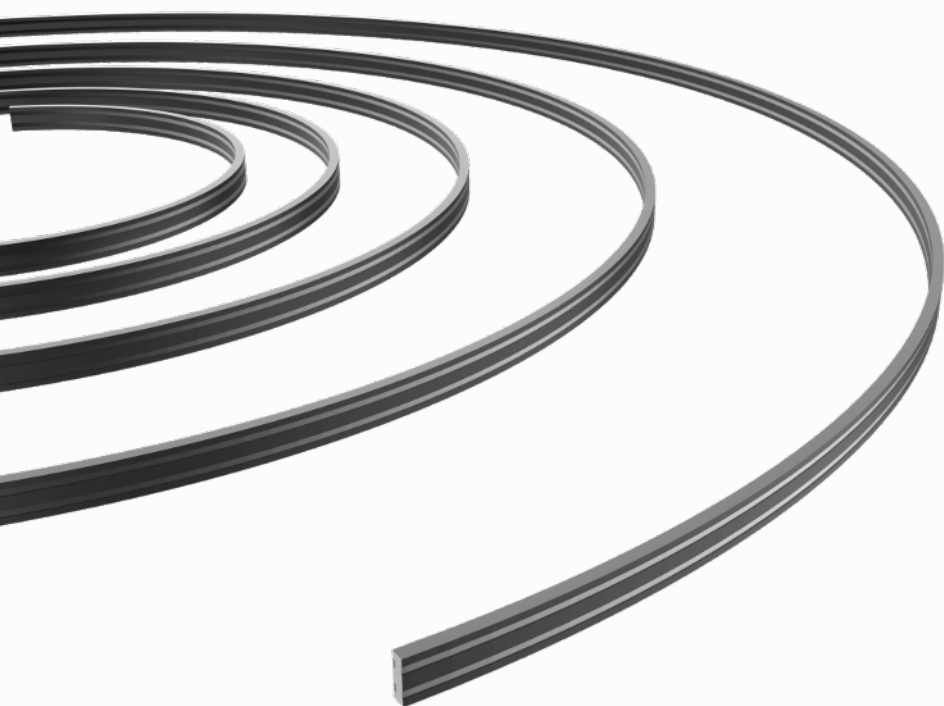

NL-FTS TRACK



Copper+PVC
Body



IP20

Body Color	:	BK
Dimension	:	W4xH14
Length	:	10Mtr. Roll




FTS MAGNETIC



Type : **FTS CEILING PART**
Dimension : D40xH90
Body Color : BK
Feature : Track Ceiling Fix Parts PC



Type : **FTS TRACK CONNECTOR**
Dimension : D40xH90
Body Color : BK
Feature : TRACK CONNECTOR

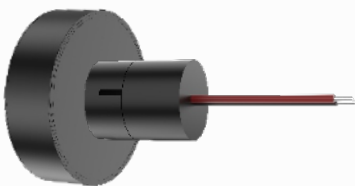


Type : **FTS POWER SUPPLY**
Power : **150W**
Dimension : D100xH30
Body Color : BK
Feature : 48V POWER SUPPLY FOR FTS SERIES



Type : **FTS INPUT MODULAR**
Dimension : D40xH90
Body Color : BK
Feature : INPUT MODULE-DC48V

FTS MAGNETIC

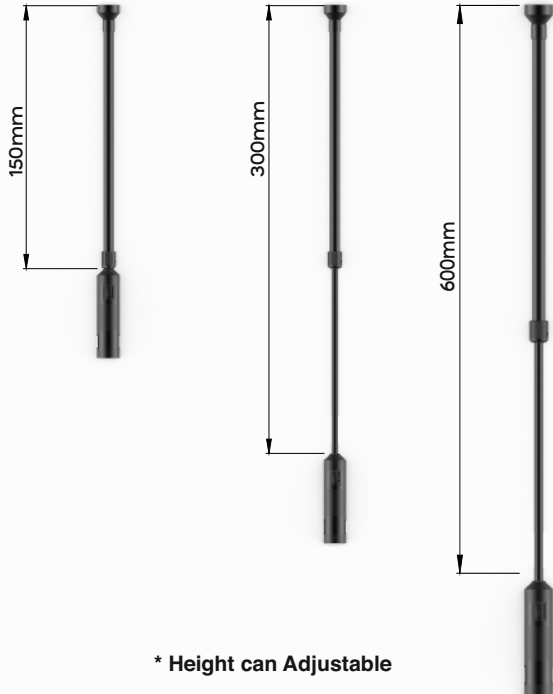

* Height can Adjustable

FTS HANGING ROD



Aluminum+PC
Body

Feature : Adjustable Height Hanging Rod
Length : 150 / 300 / 600 mm

FTS HANGING MODULE




Aluminum+PC
Body

Feature : Adjustable Height Hanging Rod with Module



FTS MAGNETIC

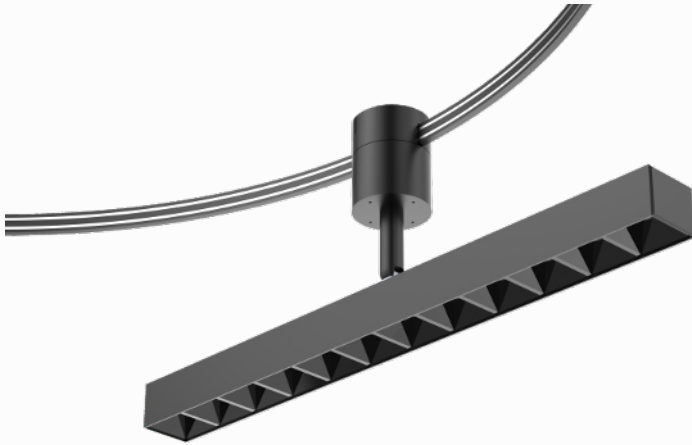

NL-FTS 01



Aluminum+PC
Body



IP20





CRI>90+



Anti-Glare

Power	:	12W(DC 48V)
Body Color	:	BK
Dimension	:	W35xH28xL365
Length	:	N/A
Beam Angle	:	24°
Lumens	:	1080LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF

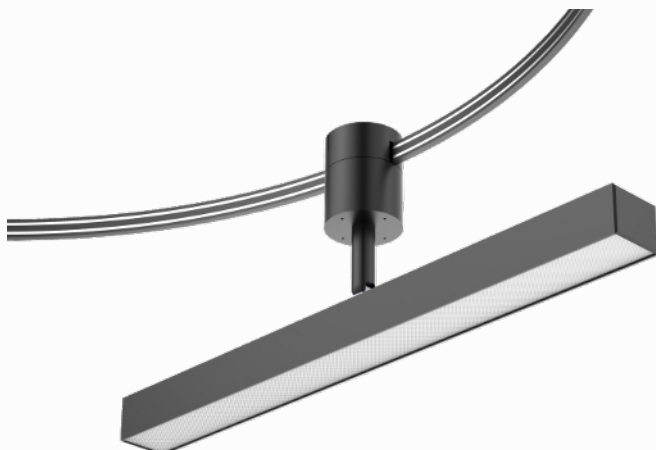

NL-FTS 02



Aluminum+PC
Body




IP20



CRI>90+

Power	:	12W(DC 48V)
Body Color	:	BK
Dimension	:	W35xH28xL365
Length	:	N/A
Beam Angle	:	100°
Lumens	:	1080LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF



FTS MAGNETIC



NL-FTS 03



ALUMINUM+
GLASS
Body




IP20



CRI>90+

Power	:	7W(DC 48V)
Body Color	:	BK
Dimension	:	D100
Length	:	N/A
Beam Angle	:	270°
Lumens	:	630LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF



NL-FTS 04



ALUMINUM+
GLASS
Body




IP20




CRI>90+

Power	:	7W(DC 48V)
Body Color	:	BK
Dimension	:	D100
Length	:	N/A
Beam Angle	:	270°
Lumens	:	630LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF



FTS MAGNETIC



NL-FTS 05



Aluminum+PC
Body



IP20




CRI>90+



Anti-Glare

Power	:	7W(DC 48V)
Body Color	:	BK
Dimension	:	D100xH60
Length	:	N/A
Beam Angle	:	24°
Lumens	:	630LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF



NL-FTS 06



Aluminum+PC
Body



IP20



CRI>90+



Anti-Glare

Power	:	7W(DC 48V)
Body Color	:	BK
Dimension	:	D100xH60
Length	:	N/A
Beam Angle	:	24°
Lumens	:	630LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF



FTS MAGNETIC




NL-FTS 07



Aluminum+PC
Body IP20 CRI>90+

Power	:	10W(DC 48V)	20W(DC 48V)
Body Color	:	BK	BK
Dimension	:	D30xL300	D30xL600
Length	:	N/A	N/A
Beam Angle	:	160°	160°
Lumens	:	900LM±5%	1800LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)	3K/4K/6K (Pre Select With Dip Switch)



Control System : ON-OFF




NL-FTS 08



Aluminum+PC
Body IP20 CRI>90+

Power	:	10W(DC 48V)
Body Color	:	BK
Dimension	:	D100
Length	:	N/A
Beam Angle	:	110°
Lumens	:	900LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)



Control System : ON-OFF

FTS MAGNETIC




NL-FTS 09



Aluminum+
Silicone
Body

Power	:	20W(DC 48V)	40W(DC 48V)
Body Color	:	BK	BK
Dimension	:	D22xL1000	D22xL2000
Length	:	N/A	N/A
Beam Angle	:	360°	360°
Lumens	:	1800LM±5%	3600LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF




NL-FTS 10



Aluminum+PC
Body

Power	:	9W(DC 48V)
Body Color	:	BK
Dimension	:	D90xH35
Length	:	N/A
Beam Angle	:	24°
Lumens	:	810LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)

Control System : ON-OFF




FTS MAGNETIC



NL-FTS 11



Power	:	7W(DC 48V)	10W(DC 48V)
Body Color	:	BK	BK
Dimension	:	Ø35xL90	Ø45xL100
Length	:	N/A	N/A
Beam Angle	:	24°	24°
Lumens	:	630LM±5%	900LM±5%
CCT	:	3K/4K/6K (Pre Select With Dip Switch)	3K/4K/6K (Pre Select With Dip Switch)



Control System : ON-OFF



